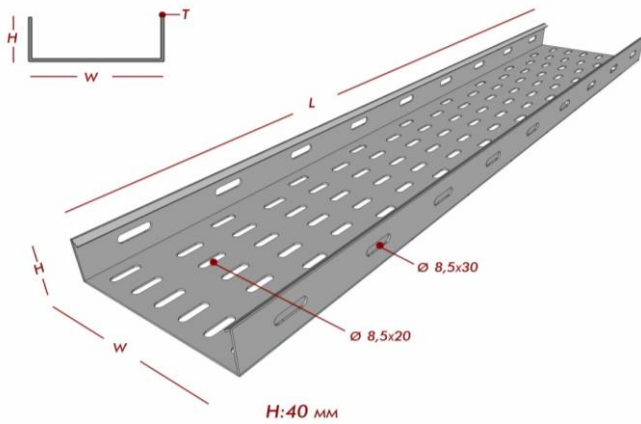


Heavy Duty Type Cable Trays - A PK Series
40
 Side Height


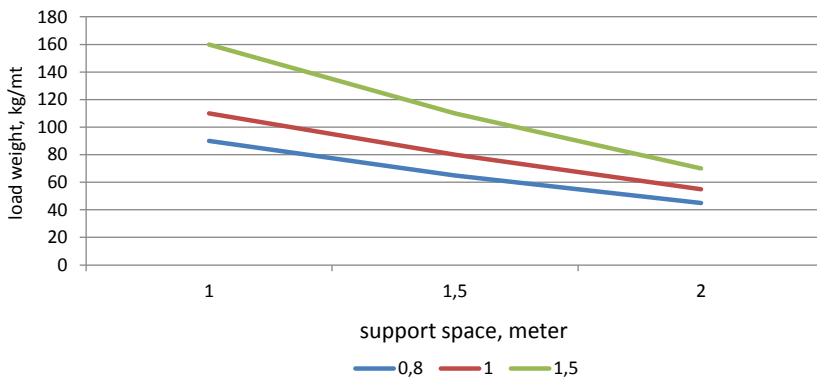
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/m	Order Code (PG)
APK 405 08	50	0,80	0,942	1200 40 050 08 1
APK 410 08	100	0,80	1,256	1200 40 100 08 1
APK 416 08	160	0,80	1,633	1200 40 160 08 1
APK 420 10	200	1,00	2,355	1200 40 200 10 1
APK 426 10	260	1,00	2,826	1200 40 260 10 1
APK 430 10	300	1,00	3,140	1200 40 300 10 1
APK 440 15	400	1,50	5,888	1200 40 400 15 1
APK 450 15	500	1,50	7,065	1200 40 500 15 1
APK 460 15	600	1,50	8,243	1200 40 600 15 1

*Standard Length(L) 3000mm / on request 2500mm

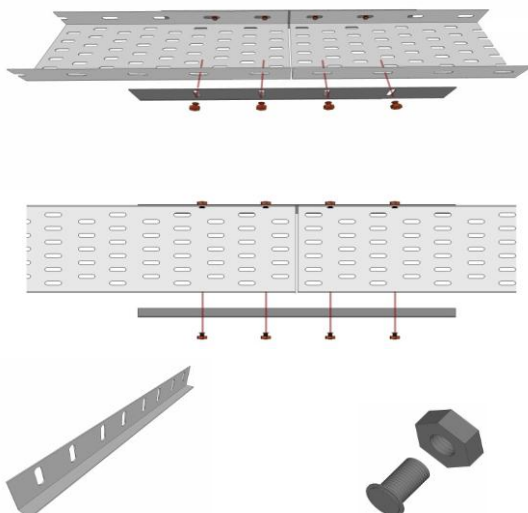
*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

H: 40 Heavy Duty Type Cable Tray Load Graph


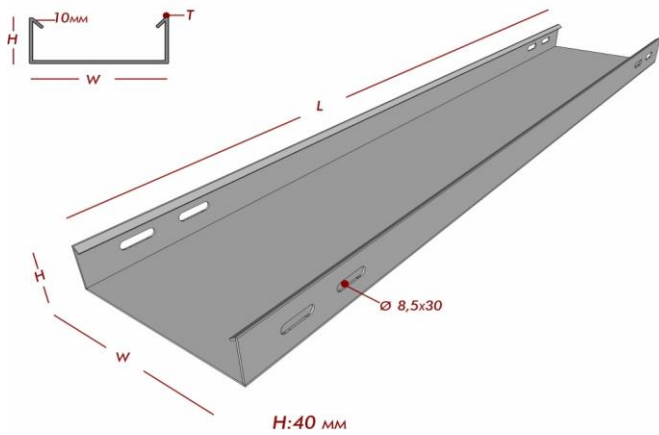
Width, (W) mm	Useful Gross Section cm ²
50	18,6
100	38,6
160	62,6
200	78,6
260	102,6
300	118,6
400	158,6
500	198,6
600	238,6

Straight Connector


Model Number	Length (mm)	Plate Thick. (mm)	Weight kg/pcs	Order Code (PG)
KBE 240 10	120	1	0,052	8002 40 120 10 1
BE 240 10	240	1	0,108	8002 40 240 10 1
BE 240 15	240	1,5	0,162	8002 40 240 15 1

*Each Connector needs 4 sets of M8 Bolt & Nuts.....

Model Number	Length (mm)	Diameter, (mm)	Weight kg/set	Order Code (PG)
CS M8	15	8	0,012	9000 08 015 00 1

Heavy Duty Non Perfoated Type Cable Trays - ADK Series
40
 Side Height


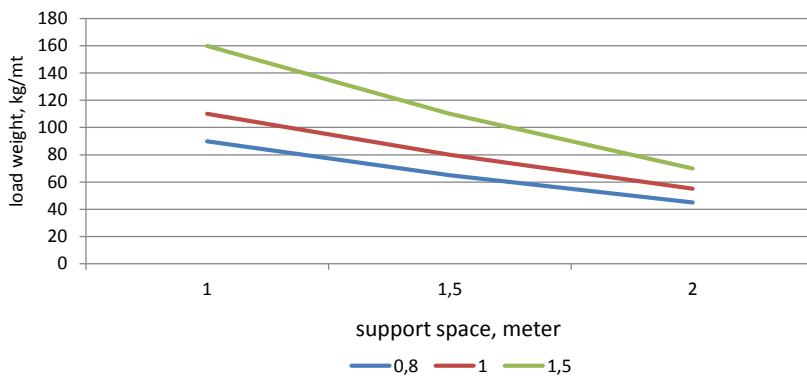
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/m	Order Code (PG)
ADK 405 08	50	0,80	0,942	1300 40 050 08 1
ADK 410 08	100	0,80	1,256	1300 40 100 08 1
ADK 416 08	160	0,80	1,633	1300 40 160 08 1
ADK 420 10	200	1,00	2,355	1300 40 200 10 1
ADK 426 10	260	1,00	2,826	1300 40 260 10 1
ADK 430 10	300	1,00	3,140	1300 40 300 10 1
ADK 440 15	400	1,50	5,888	1300 40 400 15 1
ADK 450 15	500	1,50	7,065	1300 40 500 15 1
ADK 460 15	600	1,50	8,243	1300 40 600 15 1

*Standard Length(L) 3000mm / on request 2500mm

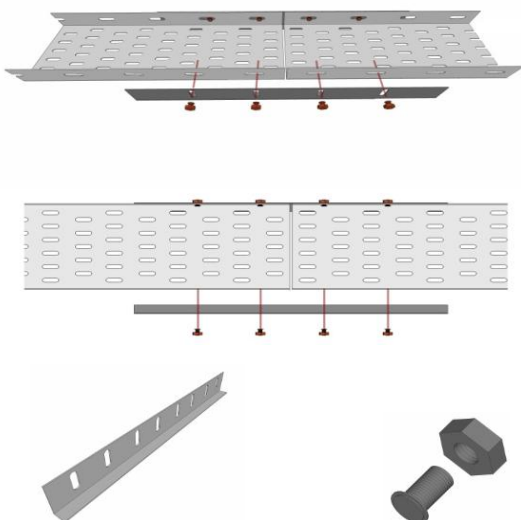
*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

H: 40 Heavy Duty Non Type Cable Tray Load Graph


Width, (W) mm	Useful Gross Section cm ²
50	18,6
100	38,6
160	62,6
200	78,6
260	102,6
300	118,6
400	158,6
500	198,6
600	238,6

Straight Connector


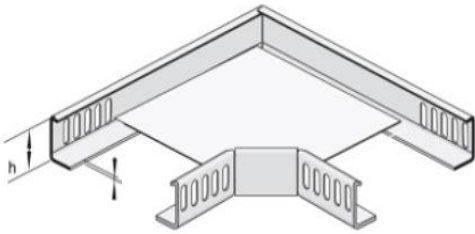
Model Number	Length (mm)	Plate Thick. (mm)	Weight kg/pcs	Order Code (PG)
KBE 240 10	120	1	0,052	8002 40 120 10 1
BE 240 10	240	1	0,108	8002 40 240 10 1
BE 240 15	240	1,5	0,162	8002 40 240 15 1

*Each Connector needs 4 sets of M8 Bolt & Nuts.....

Model Number	Length (mm)	Diameter, (mm)	Weight kg/set	Order Code (PG)
CS M8	15	8	0,012	9000 08 015 00 1


90° Horizontal Bend
40

Side Height



Order Code	Radius
------------	--------

1221.....	R:150
1222.....	R:300
1223.....	R:450
1224.....	R:600



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KA90 405 10	50	1,00	0,484	1220 40 050 10 1
KA90 410 10	100	1,00	0,617	1220 40 100 10 1
KA90 416 10	160	1,00	0,829	1220 40 160 10 1
KA90 420 12	200	1,20	1,202	1220 40 200 12 1
KA90 426 12	260	1,20	1,570	1220 40 260 12 1
KA90 430 12	300	1,20	1,852	1220 40 300 12 1
KA90 440 15	400	1,50	3,364	1220 40 400 15 1
KA90 450 15	500	1,50	4,647	1220 40 500 15 1
KA90 460 15	600	1,50	6,166	1220 40 600 15 1

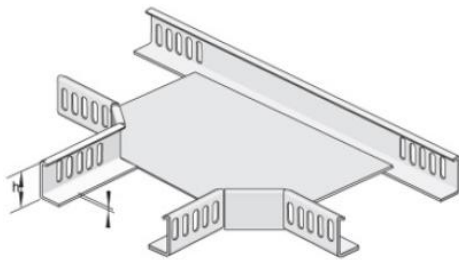
*No connectors required for fixing to trays

*Required 8 sets of M8 Bolt & Nuts

*Please specify A and B dimensions if order unequal bend / different radius


*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Tee Horizontal Bend


Order Code	Radius
------------	--------

1231.....	R:150
1232.....	R:300
1233.....	R:450
1234.....	R:600



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KAT 405 10	50	1,00	0,681	1230 40 050 10 1
KAT 410 10	100	1,00	0,801	1230 40 100 10 1
KAT 416 10	160	1,00	0,997	1230 40 160 10 1
KAT 420 12	200	1,20	1,390	1230 40 200 12 1
KAT 426 12	260	1,20	1,738	1230 40 260 12 1
KAT 430 12	300	1,20	2,007	1230 40 300 12 1
KAT 440 15	400	1,50	3,515	1230 40 400 15 1
KAT 450 15	500	1,50	4,758	1230 40 500 15 1
KAT 460 15	600	1,50	6,235	1230 40 600 15 1

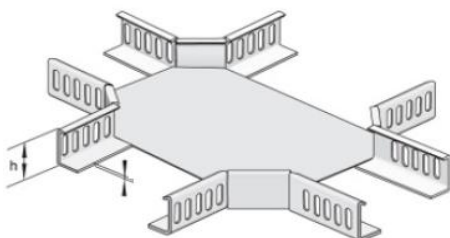
*No connectors required for fixing to trays

*Required 12 sets of M8 Bolt & Nuts

*Please specify A, B and C dimensions if order unequal bend / different radius


*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Crossing Horizontal Bend


Order Code	Radius
------------	--------

1241.....	R:150
1242.....	R:300
1243.....	R:450
1244.....	R:600



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KAD 405 10	50	1,00	0,911	1240 40 050 10 1
KAD 410 10	100	1,00	1,017	1240 40 100 10 1
KAD 416 10	160	1,00	1,196	1240 40 160 10 1
KAD 420 12	200	1,20	1,616	1240 40 200 12 1
KAD 426 12	260	1,20	1,944	1240 40 260 12 1
KAD 430 12	300	1,20	2,201	1240 40 300 12 1
KAD 440 15	400	1,50	3,716	1240 40 400 15 1
KAD 450 15	500	1,50	4,917	1240 40 500 15 1
KAD 460 15	600	1,50	6,354	1240 40 600 15 1

*No connectors required for fixing to trays

*Required 16 sets of M8 Bolt & Nuts

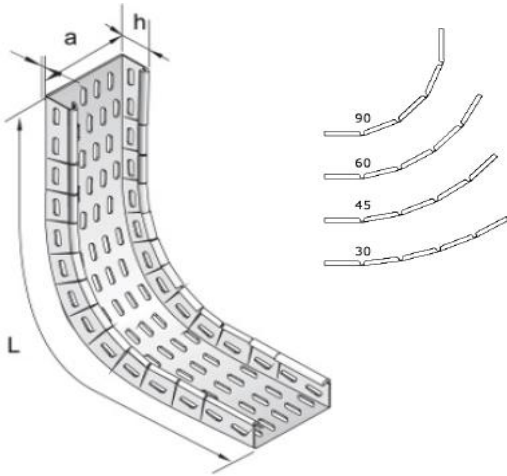
*Please specify A, B and C dimensions if order unequal bend / different radius

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

90° Vertical Bend
40

Side Height



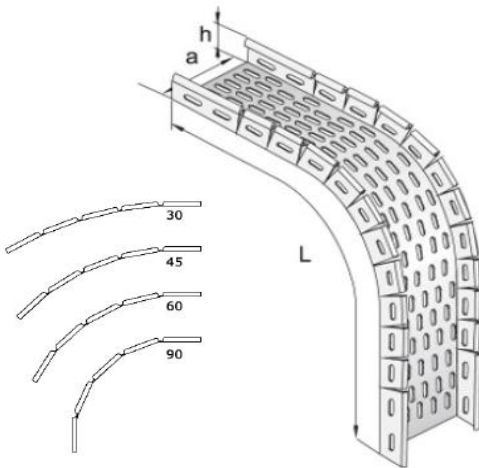
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KAIB 405 08	50	0,80	0,612	1250 40 050 08 1
KAIB 410 08	100	0,80	0,816	1250 40 100 08 1
KAIB 416 08	160	0,80	1,061	1250 40 160 08 1
KAIB 420 10	200	1,00	1,531	1250 40 200 10 1
KAIB 426 10	260	1,00	1,837	1250 40 260 10 1
KAIB 430 10	300	1,00	2,041	1250 40 300 10 1
KAIB 440 15	400	1,50	3,827	1250 40 400 15 1
KAIB 450 15	500	1,50	4,592	1250 40 500 15 1
KAIB 460 15	600	1,50	5,358	1250 40 600 15 1

*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts

*Flexible Vertical bend delivered in plain position and may be used for 30, 60, 90 degrees

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

90° Vertical Bend


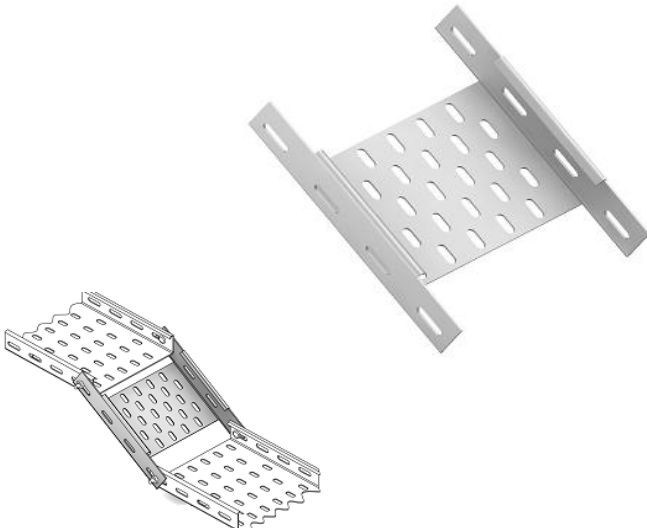
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KADB 405 08	50	0,80	0,612	1250 40 050 08 1
KADB 410 08	100	0,80	0,816	1250 40 100 08 1
KADB 416 08	160	0,80	1,061	1250 40 160 08 1
KADB 420 10	200	1,00	1,531	1250 40 200 10 1
KADB 426 10	260	1,00	1,837	1250 40 260 10 1
KADB 430 10	300	1,00	2,041	1250 40 300 10 1
KADB 440 15	400	1,50	3,827	1250 40 400 15 1
KADB 450 15	500	1,50	4,592	1250 40 500 15 1
KADB 460 15	600	1,50	5,358	1250 40 600 15 1

*Each length of tray needs 2 pcs of connectors + 8 sets of M8 Bolt & Nuts

*Flexible Vertical bend delivered in plain position and may be used for 30, 60, 90 degrees

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Modular Adjustable Riser Bend


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
KAMB 405 08	50	0,80	0,143	1270 40 050 08 1
KAMB 410 08	100	0,80	0,184	1270 40 100 08 1
KAMB 416 08	160	0,80	0,233	1270 40 160 08 1
KAMB 420 10	200	1,00	0,332	1270 40 200 10 1
KAMB 426 10	260	1,00	0,393	1270 40 260 10 1
KAMB 430 10	300	1,00	0,434	1270 40 300 10 1
KAMB 440 15	400	1,50	0,804	1270 40 400 15 1
KAMB 450 15	500	1,50	0,957	1270 40 500 15 1
KAMB 460 15	600	1,50	1,110	1270 40 600 15 1

*No connectors required for fixing to trays

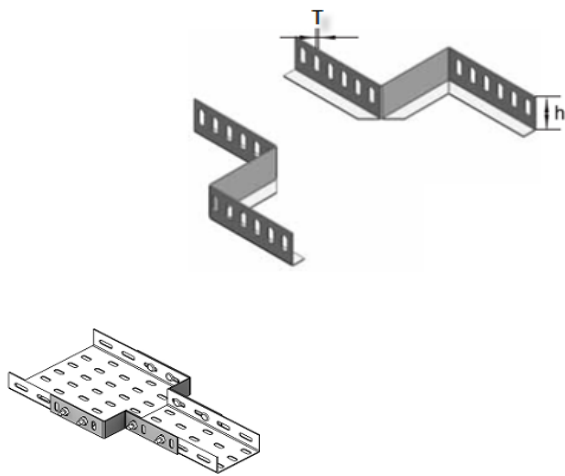
*Required 4 sets of M8 Bolt & Nuts for each modul

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Middle Reducer Connection (set)
40

Side Height

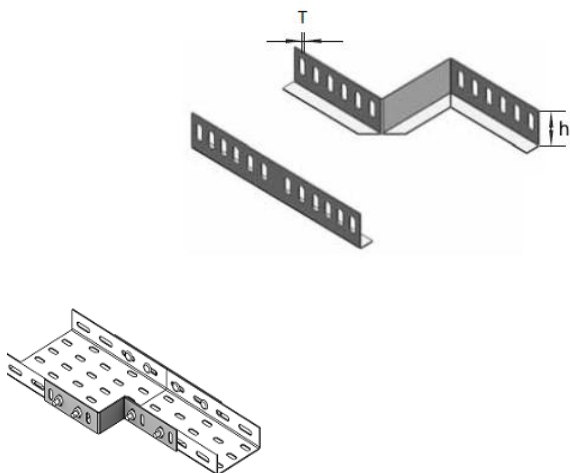


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/set	Order Code (PG)
RO 404 08	40	1,50	0,254	8010 40 040 15 1
RO 405 08	50	1,50	0,259	8010 40 050 15 1
RO 406 08	60	1,50	0,264	8010 40 060 15 1
RO 408 10	80	1,50	0,273	8010 40 080 15 1
RO 410 10	100	1,50	0,283	8010 40 100 15 1
RO 416 10	160	1,50	0,311	8010 40 160 15 1
RO 420 15	200	1,50	0,330	8010 40 200 15 1
RO 430 15	300	1,50	0,377	8010 40 300 15 1
RO 440 15	400	1,50	0,424	8010 40 400 15 1
RO 450 15	500	1,50	0,471	8010 40 500 15 1

*Each Connector Set needs 8 sets of M8 Bolt & Nuts.....

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

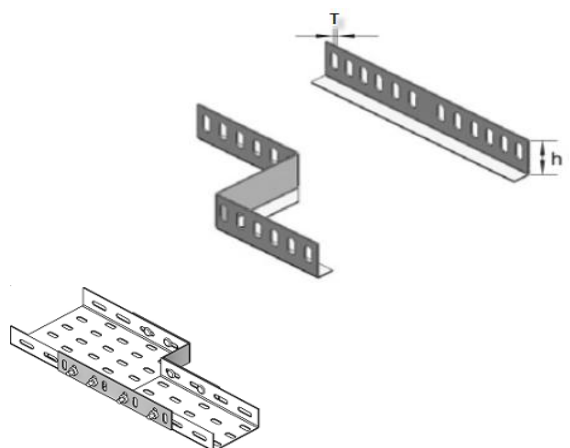
Left Reducer Connection (set)


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/set	Order Code (PG)
RL 404 08	40	1,50	0,254	8020 40 040 15 1
RL 405 08	50	1,50	0,259	8020 40 050 15 1
RL 406 08	60	1,50	0,264	8020 40 060 15 1
RL 408 10	80	1,50	0,273	8020 40 080 15 1
RL 410 10	100	1,50	0,283	8020 40 100 15 1
RL 416 10	160	1,50	0,311	8020 40 160 15 1
RL 420 15	200	1,50	0,330	8020 40 200 15 1
RL 430 15	300	1,50	0,377	8020 40 300 15 1
RL 440 15	400	1,50	0,424	8020 40 400 15 1
RL 450 15	500	1,50	0,471	8020 40 500 15 1

*Each Connector Set needs 8 sets of M8 Bolt & Nuts.....

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

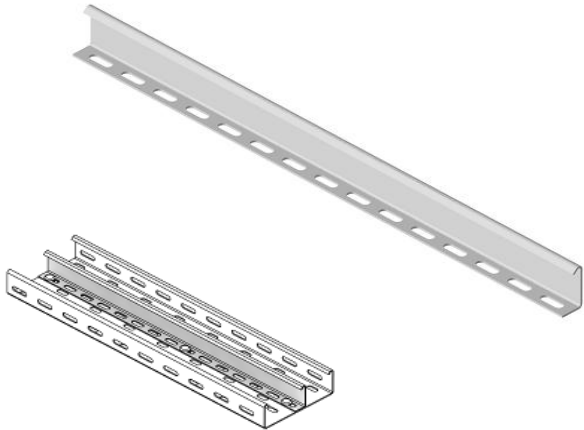
Right Reducer Connection (set)


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/set	Order Code (PG)
RG 404 08	40	1,50	0,254	8030 40 040 15 1
RG 405 08	50	1,50	0,259	8030 40 050 15 1
RG 406 08	60	1,50	0,264	8030 40 060 15 1
RG 408 10	80	1,50	0,273	8030 40 080 15 1
RG 410 10	100	1,50	0,283	8030 40 100 15 1
RG 416 10	160	1,50	0,311	8030 40 160 15 1
RG 420 15	200	1,50	0,330	8030 40 200 15 1
RG 430 15	300	1,50	0,377	8030 40 300 15 1
RG 440 15	400	1,50	0,424	8030 40 400 15 1
RG 450 15	500	1,50	0,471	8030 40 500 15 1

*Each Connector Set needs 8 sets of M8 Bolt & Nuts.....

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Barrier Strip
40
 Side Height


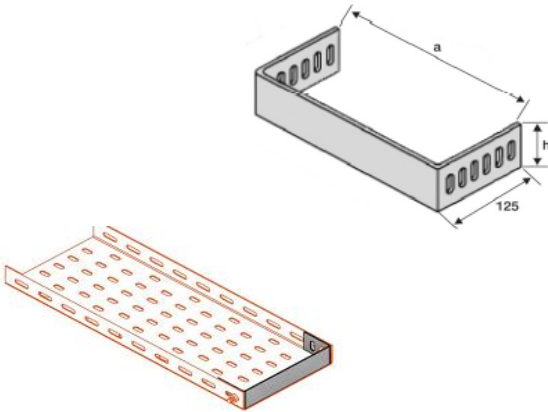
Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/m	Order Code (PG)
SEP 240 08	15	0,80	0,345	8112 40 000 08 1
SEP 240 09	15	0,90	0,389	8112 40 000 09 1
SEP 240 10	15	1,00	0,432	8112 40 000 10 1
SEP 240 12	15	1,20	0,518	8112 40 000 12 1
SEP 240 15	15	1,50	0,648	8112 40 000 15 1
SEP 240 20	15	2,00	0,864	8112 40 000 20 1

*Standard Length 3000mm / on request 2500mm

*Each Separator needs M8x15mm Bolt & Nuts for fixing to trays

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

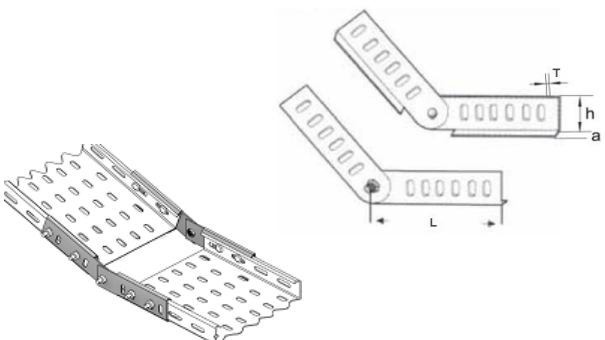
Stop End


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
SON 405 08	50	1,50	0,141	8210 40 050 15 1
SON 410 08	100	1,50	0,165	8210 40 100 15 1
SON 416 08	160	1,50	0,193	8210 40 160 15 1
SON 420 10	200	1,50	0,212	8210 40 200 15 1
SON 426 10	260	1,50	0,240	8210 40 260 15 1
SON 430 10	300	2,00	0,345	8210 40 300 20 1
SON 440 15	400	2,00	0,408	8210 40 400 20 1
SON 450 15	500	2,00	0,471	8210 40 500 20 1
SON 460 15	600	2,00	0,534	8210 40 600 20 1

*Each Stop End needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

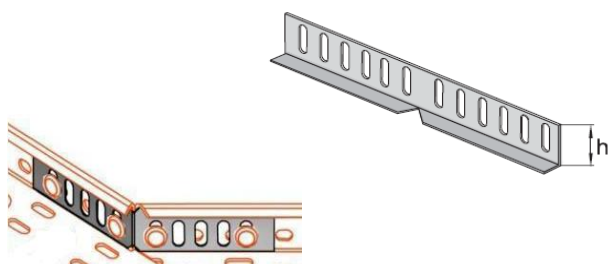
Adjustable Vertical Connector


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
BDD 240 12	300	1,20	0,155	8322 40 300 12 1
BDD 240 15	300	1,50	0,194	8322 40 300 15 1
BDD 240 20	300	2,00	0,259	8322 40 300 20 1

*Each Adjustable Connector needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+

Adjustable Horizontal Connector- BYD Series


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight kg/pcs	Order Code (PG)
BYD 140 08	300	0,80	0,104	8311 40 300 08 1
BYD 140 10	300	1,00	0,130	8311 40 300 10 1
BYD 140 15	300	1,50	0,194	8311 40 300 15 1

*Each Adjustable Connector needs 4 sets of M8x15mm Bolt & Nuts for fixing to tray

*PG: Steel, Pregalvanised ISO EN 10327 (TS 822)

PG	HDG	EPOXY	AISI 304	AISI 316
+	+	+	+	+